

Series
E60/E120/E240



UL CE Ex IECEx IP68

Economical. Eco-Friendly. Intrinsically Safe.



Pulsarlube **E**



Features & Advantages

Excellent Features

More reliable against ambient temperature variations due to inert Nitrogen gas generation

Cost Savings

Highly cost-effective

Eco-Friendly

Eco-friendly product, where applicable parts can be disposed of separately

Intrinsic Safety

Certified CE, ATEX, UL for use in hazardous areas

Easy & Simple Maintenance

- ▶ Various dispensing settings & grease volume capacities to suit all industrial applications
- ▶ Easy to adjust dispensing periods, even while in operation
- ▶ Easy to install in hazardous & confined areas



Typical Applications




- Automotives
- Motors & pumps
- Petrochemical plants
- Paper, Steel mill, Cement plants where water & excessive contaminants exist
- Electronics industries in need of small amounts of lubricant (60ml)



Details



Specifications

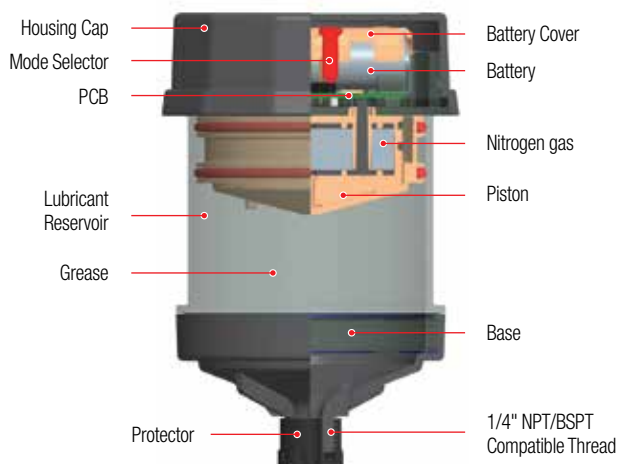

Grease Capacity

60 ml / 120 ml / 240 ml

Gas Type

Nitrogen (N₂) gas

Gas Generating Method

Electrochemical reaction

Operating Pressure

Max. 5 kgf/cm² (70 psi)

Operating Temperature

20°C ~ 55°C (-4°F ~ 131°F)

Dispensing Periods

1, 3, 6, 9, 12 month

Product Certifications & IP Code

ATEX / UL / IECEx / KCs / CE / IP68

Remote Installation

Max. 1 m (3ft) with Ø8mm tube