

Series

M60/M125/M250/M500



UL CE IP54

Advanced Diagnostics. Unrivaled Output Pressure & Temp. Capability. Total Reliability.



Pulsarlube **M**

Features & Advantages


Cost Savings	Substantial savings from the use of replaceable grease pouches and battery packs (Service Pack)
Remote Installation	High output pressure (30kgf/cm ²) enables remote installation up to 10m (33ft)
Multi-Point Installation	Up to 8 lube points using Ø6mm tube, Max. 6m (20ft) per point
Simple Button Controls	Easy to program with built-in LCD and simple button controls
Convenient Maintenance	Transparent container for easy visual inspection of remaining lubricant
Other Features	<ul style="list-style-type: none"> ▶ Various dispensing settings & grease pouch volumes to suit all industrial applications ▶ Auto Lock Out mode to prevent unintentional mode changes ▶ Easy to install in hazardous & confined areas

Typical Applications



- Automotive, Iron/Steelmaking, Nuclear power plants
- Cleanroom & LM Guide where precise, multi-point lubrication is needed.
- HVAC equipment & Cooling towers where long lube lines may be necessary.
- Motors and pumps in city water & wastewater treatment facilities
- Any places with extreme (low or high) temperature

Details

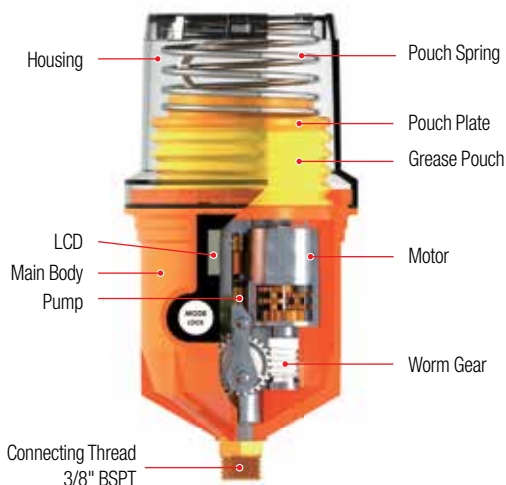

Specifications

Grease Pouch Capacity

60ml/125ml/250ml/500ml (replaceable)

Operating Pressure

Avg. 30kgf/cm² (425psi)
Max. 60kgf/cm² (850psi)

Operating Temperature

Standard Alkaline Battery : -15°C ~ 60°C (5°F ~ 140°F)
Optional Lithium Battery : -40°C ~ 60°C (-40°F ~ 140°F)

Dispensing Periods

60ml: 1, 2, 3, 10, 11, 12 month
125ml/250ml: 1, 2, 3, 6, 12 month & H (15 days)
500ml: 1, 2, 4, 6, 12, 18, 24 month & H (15 days)

Multi-Point Installation

Max. 6m with Ø6mm tube
(up to 8 lube points)

Remote Installation

Max. 10m (33ft) with Ø6mm tube

Power Supply

DC 4.5V Battery Pack (replaceable)
Standard Battery Pack: Alkaline Battery
Optional Battery Pack: Lithium Battery

Dispensing Volume Size

0.34ml/stroke (@20°C/68°F)

Product Certifications & IP Code

UL/CE/IP54